

MP36-2

MOTOR PUMPS - FOR CLEAN WATER




Self priming Petrol powered pumps to move large quantities of water, whether during flooding or simply filling a pond.

Main Technical Data

Type	Semitrash	
Max suction head	m	8
Max Delivery Head	m	30
Delivery Volume	l/min	600

Performance curve

Graph

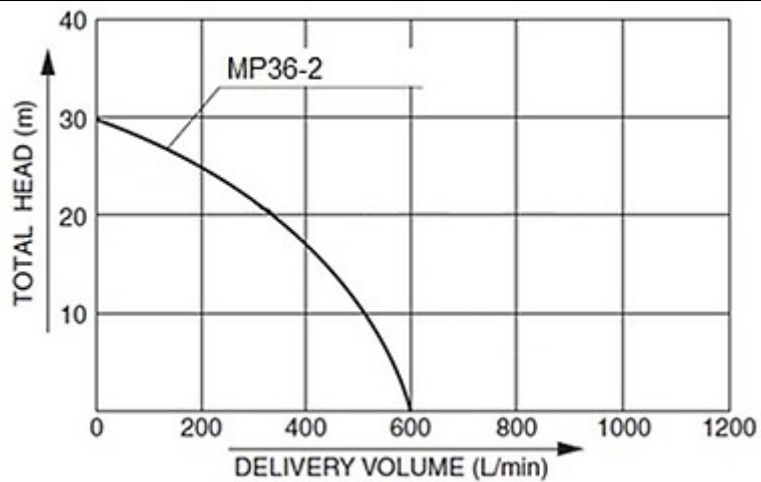

Engine specifications

Engine manufacturer		Honda
Nr. of cylinder and disposition		1 inclination angle
Displacement	cm ³	118
Fuel		Petrol
Starting system		Recoil



Pump specifications

Manufacturer		KOSHIN
Inlet pipe diameter	'	2
Outlet pipe diameter	'	2
Max Solid Size	mm	-
Material for mechanical seal		Carbon Ceramic
Material for impeller		Cast Iron
Material for volute		Aluminum Die Cast

Dimensional data

Length	(L) mm	470
Width	(W) mm	365
Height	(H) mm	390
Dry weight	Kg	26

Consumption, running time and noise

Fuel tank capacity	l	2.0
Running time	h	2.0
Noise level at 7 m	dB(A)	78
Guaranteed noise level (LWA)	dB(A)	103

General equipment

Strainer	n°	1
Coupling Set	n°	2
Hose band	n°	3
Spark plug tool		Standard
Oil guard		Standard



Accessories

Inlet pipes - length 8m		2"
Inlet pipes - length 25m		2"
Outlet pipes - length 10m		2"
Outlet pipes - length 50m		2"
Outlet pipes - length 100m		2"



The information is aligned with the Data file at the time of download. Printed on 15/01/2021 (ID 697)

©2021 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

