GSW1020B

Main Features		
Frequency	Hz	60
Voltage	V	480
Power factor	cos ϕ	0.8
Phase		3

Power Rating		
Emergency Standby Power ESP	kVA	1019.47
Emergency Standby Power ESP	kW	815.58
Prime power PRP	kVA	921.79
Prime power PRP	kW	737.43

Ratings definition (ISO-8528)

ESP - Emergency Standby Power:
It is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70 % of the ESP.

PRP - Prime Power:
It is defined as being the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output over 24 h of operation shall not exceed 70 % of the prime power.

www.pramac.com

Engine specifications		
Engine Brand		Baudouin
Model		12M26 G800/6
Version		60 Hz
[50Hz] Exhaust emission level		Non Emission Certified
Engine cooling system		Water
Nr. of cylinder and disposition		6 in line
Displacement	cm^3	31200
Aspiration		Turbocharged aftercooled
Speed governor		Electronic
Operating Speed-Nominal	rpm	1800
Prime gross power PRP	kW	820
Maximum gross power LTP ESP	kW	902
Oil capacity	l	109
Lube oil consumption PRP (max)	%	0.3
Coolant capacity	l	148
Fuel		Diesel
Specific fuel consumption 75% PRP	g/kWh	207.4
Specific fuel consumption PRP	g/kWh	208.1
Starting system		Electric
Starting engine capability	kW	10
Electric circuit	V	24

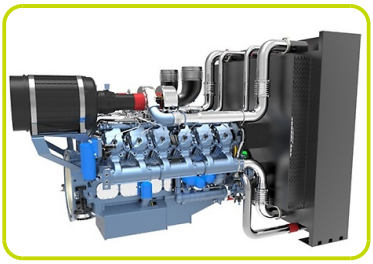

Fuel system:
- In line fuel injection pump
- Duplex fine filter and water separation filter assembly with transparent cup for better efficiency
- Electric fuel priming pump

Cooling system
- Thermostatically-controlled system with belt driven coolant pump and pusher fan

Lubrication system
- Full flow screw able oil filters
- Lube oil purifier with replaceable cartridge

Air intake and exhaust system
- Top mounted turbocharger optimized for genset application
- Special rear mounted air filter with restriction indicator

www.pramac.com

Alternator Specifications		
Alternator		Mecc Alte
Model		ECO43-1S
Voltage	V	480
Frequency	Hz	60
Power factor	cos ϕ	0.8
Voltage regulation system		Electronic
Poles		4
Type		Brushless
Standard AVR		DER1-A
Voltage tolerance	%	1
Efficiency @ 75% load	%	95.6
Class		H
IP protection		23
Phases		3

Mechanical structure
Robust mechanical structure which permits easy access to the connections and components during routine maintenance check-ups.

Voltage regulator

Voltage regulation with DER 1. The digital DER 1 is a Digital controlled regulator, based on DSP (Digital Signal Processor) that combines function as Voltage Regulation and Alternator Protections and Diagnostic into a very small single board.
Voltage supply: 40Vac÷270Vac
Maximum continuous output current: 4Adc
Frequency range: 12Hz÷72Hz
Single phase sensing automatic recognition
Average value of voltage regulation
Voltage regulation range (sensing) from 75Vac to 300Vac
Precision of voltage regulation: ± 1% from no-load to nominal load in static condition, with any power factor and for frequency variations ranging from -5% to +20% of the nominal value.
Precision of voltage regulation: ± 0,5% in stabilized conditions (load, temperature).
Transient voltage drop and overvoltage within ± 15%
Voltage recovery time within ± 3% of the value set, in less than 300 msec.
Underspeed protection with adjustable threshold and slope
Overvoltage and undervoltage alarms
Excitation overcurrent protection with delayed intervention
Alarm conditions storage (type of alarm, number of events, duration of the last event, total time)
Memorization of the regulator operation time

Windings / Excitation system
Generator stator is wound to 2/3 pitch. This eliminates triple (3rd, 9th, 15th …) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non-linear loads. The 2/3 pitch design avoids excessive neutral currents sometimes seen with higher winding pitches. MAUX (Standard): The MAUX MeccAlte Auxiliary Winding is a separate winding within the main stators that feeds the regulator. This winding enables to take an overload of 300% forced current (short circuit maintenance) for 20 seconds. This is ideal for motor starting requirements. PMAUX (optional): Alternator can be equipped with the optional PMAUX (Permanent Magnet Generator) which matches the performance and is capable of supporting both linear and distorted loads.

Insulation / Impregnation
Insulation is of class H standard. Impregnation is made with premium tropicalised epoxy resins by dipping and dripping. High voltage parts are impregnated by vacuum, so the insulation level is always very good. In the high-power models, the stator windings undergo a second insulation process. Grey protection is applied on the main and exciter stator to give enhanced protection.

Reference standards
Alternator manufactured according to , and complies with , the most common specification such as CEI 2-3, IEC 34-1, EN 60034-1, VDE 0530, BS 4999-5000, CAN/ CSA-C22.2 No14-95-No100-95

www.pramac.com

Genset equipment

BASE FRAME:
Base frame made of welded steel profiles, complete with anti-vibration mountings properly sized.
The baseframe has a grounding point to connect all metal parts of the generating set and it provides a high structural strength.

ENGINE COMPLETE WITH:
• Liquids (no fuel)

MANUAL OIL DRAININ PUMP:
• Oil draining facilities

CANOPY:
• Soundproof canopy made up of monolithic structure, built to achieve a high degree of stability and a protection against any kind of movement or infiltration. This kind of canopies are designed to meet a high standard of toughness and good noise attenuation as well as resistance to atmospheric agents, providing an integral solution ready for its installation both indoor and outdoor.
• Easy access to the genset for maintenance purposes thanks to: Wide lateral access doors fixed by stainless steel hinges and provided with lockable.
• Control panel protection door provided with suitable window and lockable handle.
• Lateral air inlet opening properly protected and soundproofed. Exhaust air outlet from the roof, trough wet section protected by proper grid.
• Lifting points located on the roof to facilitate the transport.

SOUNDPROOF:
• Noise attenuation thanks to soundproofing material
• Efficient residential silencer placed inside the canopy

Genset Equipment - Basic Configurations Available:		
Battery	n	2
Battery Capacity	Ah	200
MBS - Manual Battery Switch		●
INTEGRATED FUEL TANK - VERSIONS AVAILABLE		:
IFT1 - Integrated Fuel Tank (steel)	l	500
IFT2 - Integrated Fuel Tank (steel)	l	1000
FBD - Fully bunded base frame		●
LDS - Leakage detection sensor (only with FBD)		●
FCV - Fuel Cut Off Valve		●
AFP - Automatic Fuel Pump		●
DFP - Double Automatic Fuel Pump		●
PHS - Coolant Pre-Heating System - available for models:		●
ALS - Automatic Lube Oil Top Up System with lube oil tank 100L		●
[●] = Supplement available		.
Other Configurations and-or special versions available on requests		.

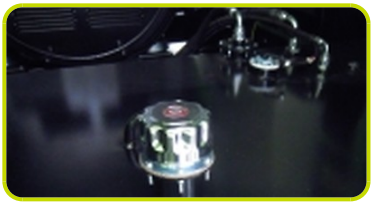

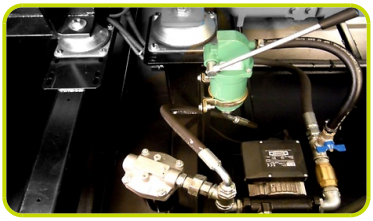

www.pramac.com

Dimensional data		
Length	(L) mm	5600
Width	(W) mm	1950
Height	(H) mm	2520
Dry weight	kg	8400

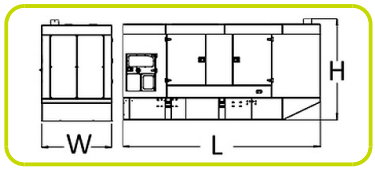

Consumption		
Fuel consumption @ 75% PRP	l/h	154.25
Fuel consumption @ 100% PRP	l/h	203.14

Noise level		
Noise pressure level @ 7 m	dB(A)	77 +/-3

Installation data		
Total air flow	m³/min	1258.70
Exhaust gas flow PRP	m³/min	166
Exhaust gas temperature LTP ESP	°C	550

Electrical Data		
Battery capacity	Ah	200
MAX current	A	1226.27
Circuit breaker	A	1250

Control panel availability	
AUTOMATIC CONTROL PANEL	ACP
MODULAR PARALLEL PANEL	MPP

www.pramac.com

ACP - Automatic control panel

Mounted on the genset, complete with digital control unit for monitoring, control and protection of the generating set, protected through door with lockable handle

DIGITAL INSTRUMENTATION
- Generating set voltage (3 phases)
- Mains voltage
- Generating set frequency
- Generating set current (3 phases)
- Battery voltage
- Power (kVA - kW - kVAr)
- Power factor Cos φ
- Hours-counter
- Engine speed r.p.m.
- Fuel level (%)
- Engine temperature (depending on model)

COMMANDS AND OTHERS
- Four operation modes: OFF - Manual starting - Automatic starting - Automatic test
- Pushbutton for forcing Mains contactor or Genset contactor
- Push-buttons: start/stop, fault reset, up/down/page/enter selection
- Remote starting availability
- Acoustic alarm
- Automatic battery charger
- USB Communication port
- Settable PASSWORD for protection level

PROTECTIONS WITH ALARM
- Engine protections: low fuel level, low oil pressure, high engine temperature
- Genset protections: under/over voltage, overload, under/over frequency, starting failure, under/over battery voltage

PROTECTIONS WITH SHUTDOWN
- Engine protections: low fuel level, low oil pressure, high engine temperature
- Genset protection: under/over voltage, overload, under/over battery voltage, battery charger failure

OTHERS PROTECTIONS
- Emergency stop button
- Panel protected through door with lockable handle

ACP - Basic Configurations Available:

POWER PANEL - BREAKERS AVAILABLE:		:
GCB1 - Genset Circuit Breaker 3-pole	A	1250
GCB2 - Genset Circuit Breaker 4-pole	A	1250
ETB - External Terminal Board (with GCB)		Standard
Various Supplement fof Remote Control		RGW [●]
Various supplements for remote signals		ARM [●]
Control Panel Anti-Condensation Heater (ACP)		CAH [●]
[●] = Supplement available		
Other Configurations and-or special versions available on requests		.

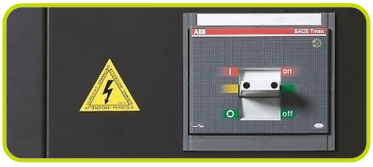

www.pramac.com

MPP - Modular parallel panel

Mounted on the genset, complete with digital control unit for monitoring, control, protection and load sharing for both single and multiple gen-sets operating in standby or parallel modes (up to 32 gen-sets in island).

DIGITAL INSTRUMENTATION (5'TFT COLOUR SCREEN)

- Mains: voltage, Intensity, Frequency.
- Mains kW - kVAr - Power factor Cos f.
- Generating set voltage (3 phases).
- Generating set frequency.
- Generating set current (3 phases).
- Generating set Power (kVA - kW - kVAr - Cos f).
- Generating set kWh and kVAh.
- Battery voltage.
- Hours-counter.
- Engine speed r.p.m.
- Fuel level (%).
- Engine temperature - Oil pressure

COMMAND AND OTHERS

- Single Parallel to Mains and Multiple parallel genset Island applications
- Operation modes: OFF- MAN - AUTO - TEST
- Pushbutton for forcing Mains Breaker/contactor or Genset Breaker/contactor.
- Push-buttons: start/stop, fault reset, up/down/page/enter selection.
- Multiple parallel and Power Management operation available.
- Automatic synchronizing and power control (via speed goveroner or ECU)
- Baseload Import/Export and Peak shaving
- Voltage and PF control.
- Configurable digital I/O (8/8) and analogue inputs (4).
- Integrate PLC programmable functions.
- Event-based history (up to 500records).
- Remote starting and Blocking signal availability.
- Acoustic alarm.
- Automatic battery charger.
- Ethernet RJ45, USB A, USB B and RS485 Comunication ports.
- Multi-pin connettor (in and out) for parallel with other generators

PROTECTION

- Engine protections: low fuel level, low oil pressure, high engine temperature.
- Genset protections: under/over voltage, overload, under/over frequency, starting failure, under/over battery voltage
- Others: overcurrent, shortcircuit, reverse power.
- Emergency stop button.
- Panel protected through door with lochetable handle

MPP - Basic Configurations Available:

POWER PANEL - BREAKERS AVAILABLE:		:
GMB1 - Genset Circuit Breaker 3-pole motorized	A	1250
GMB2 - Genset Circuit Breaker 4-pole motorized	A	1250
ETB - External Terminal Board (with GMB)		Standard
Various Supplement fof Remote Control		RCG [●]
Various supplements for remote signals		TLP [●]
Control Panel Anti-Condensation Heater (MPP)		CAH [●]
[●] = Supplement available		
Other Configurations and-or special versions available on requests		.

www.pramac.com

Accessories

Items available as accessory equipment

LTS - Load Transfer Switch [Accessories for ACP Automatic Control Panel]

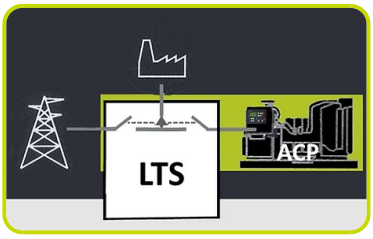

The Load Transfer Switch (LTS) panel operates the power supply changeover between the generator and the Mains in backup applications, guarantying the feeding to the load within a short period of time.
It consists of a standalone cabinet which can be installed separate from the generating set. The logic control of the power supply changeover is operated by means of the Automatic Control Panel (ACP) mounted on the generating set, so therefore none logic device is required on the LTS panel.

LTS Type ATyS_D:

- Box type: steel enclosures
- Installation mode: Standing
- Door: Hinged door closed with double barb locking.
- Ingress Protection: IP43
- Gland Plates: Removable on the top & bottom side
- Connections: Bottom/Bottom
- Motor unit
- Gland Plates: Removable on the top & bottom side
- Connections: Bottom/Bottom
- Motor unit
- Switch position indicator
- Auto/Manual cover selector
- Housing for manual handle
- Padlocking mechanism
- Two side by side mounted load break switches
- Poles 4
- Double coils self-powered
- Voltage (coils): 208/277VAC (Tollerance+/-20% 166/333VAC)
- Frequency 50 & 60HZ
- Interface ATyS D10, fixed on the door for the status indication: Two lights to indicate the voltage presence of the grid and the diesel generator; Two lights for the switch position; Functionality mode (auto/manual) and cover protection IP65.
- *Compliant with IEC 60947-3, EN 61439-6-1 and GB 14048-11*

LTS SUPPLEMENTS AVAILABLE ON REQUEST:

- ***ESB -*** *Emergency Stop Button (installed on the panel front)*
- ***APP*** *- Additional IPXXB Protection (internal plexiglass)*

www.pramac.com

The information is aligned with the Data file at the time of download. Printed on 08/11/2021 (ID 11344)

©2021 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice