BSC PWR (PRO) 810/798/20



FEATURES:


- Pre-installed battery container all-in-one solution – on a reduced footprint
- 2 options – pure on-grid solution or PRO solution (on-grid & off-grid)
- In-house power and control electronics – Perfectly optimised with maximum safety and efficiency
- State-of-the-art safety technology (monitoring / aerosol / smoke / heat / overpressure flap)
- Latest cell technology – Highest quality, durability and safety
- Scalable performance and capacity
- Energy-optimized air-air battery cooling system for higher efficency
- High accessibility for user-friendly maintenance (max. once a year)
- 10-year performance warranty with a wide temperature range

General technical data		
• **ON-GRID version:**		
Rated apparent power	kVA	810
Rated voltage	Vac	400
Frequency	Hz	50
Maximum AC current	A	1170
Battery cell	Type	Li-Ion (LFP) Prismatic
Total capacity	kWh	798
Rated net capacity (100%DoD)	kWh	798
• **Additional general technical data PRO version:**		
Rated apparent power ON-Grid	kVA	810
Rated apparent power Backup	kVA	675
Max. permissible phase unbalance	kVA	90
Max. peak current	A	1615



www.pramac.com

Inverter		
• **ON-GRID version:**		
Quantity	n.	9
Rated apparent power	kVA	90
Maximum AC current	A	130
Power factor / Range		1 / 0i ... 0c
Initial short circuit current (Ik“)	A	130
• **Additional technical data PRO Inverter:**		
Quantity	n.	9
Rated apparent power ON-Grid	kVA	90
Rated apparent power Backup	kVA	75
Max. permissible phase unbalance	kVA	10
Max. peak current	A	185
Switchover time with PSTS	s	5

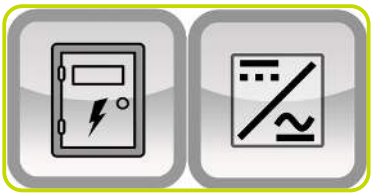

Battery		
Quantity of module	n.	99
Module capacity	kWh	8.06
Rated Voltage	V	844.8
Max. C-rate		1C
Battery cell	Type	Li-Ion (LFP) Prismatic
Cycles @ 100% DoD | 65% SoH	n.	7300




Technical data - Energy Management System		
Voltage supply	VDC	24
RJ45 dedicated MAC adresses for OT/IT use	n.	2
Encrypted MQTTS communication		√
Digital cloud twin		√
2-factor authentication		√
Communication Interface Ethernet (Modbus TCP/IP / local and cloud-to-cloud REST API)		√
• **Possible Applications**		:
Self-consumption optimization (SCO)		√
Peak shaving (PS)		√
Time-based charging/discharging (ToU)		√
Combined operation (multi-use e.g. PS and SCO)		√
Energy trading		√
Smart Self Consumption		√
Simple management of charging stations		√
Load management and prioritisation for charging points		√
Integration of Plant controllers		√
Microgrid		√



www.pramac.com

Installation data		
Cooling capacity (Battery room)	kW	2x10.2
Heating capacity (Battery room)	kW	2x3
Forced air cooling (Inverter room)		√
AC-Grid connection ON-Grid		3P, PE / TT, TN-C, TN-S
AC-Aux. grid connection ON-Grid		3P, N, PE / TT, TN-C-S
AC-Grid connection PRO		3P, N, PE / TT, TN-C-S, TN-C
AC-Aux. grid connection PRO		-
Communication Interfaces RJ45 (Ethernet)		√
Dimensions (LxWxH)		6.058×2.438×2.896
Max. permissible installation height	m	3000
Corrosion resistance		C3
Weight	kg	17.020
Pickup points	n.	4
Protection rating (battery room)	IP	55
Operating temperature range	°C	-20~50
Product warranty	Years	10
Performance warranty	Years	10

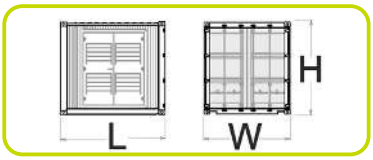

Safety devices

Permanent monitoring of the battery cells	√
Temperature and smoke sensor	√
Degassing system	√
Overpressure flap	√
Aerosol Generator	√
Firefighter connector Storz 52-C	√



Certificates / Approvals

Battery System
Modul:
UN38.3 / UL 9540A
Battery System: CE / UKCA / UN 38.3 / UN 3481 / IEC 62619 / UL 1973 / UL 9540A / VDE 2510-50 / IEC 61000-6-2 / IEC 61000-6-4

Battery Inverter
EU- Directives:
2014/30/EU / 2014/35/EU / 2011/65/EU / 2015/863/EU
Safety Battery Inverter:
IEC 62109-1 / IEC 62109-2 / IEC 62477-1 / IEC 61439-1 / IEC 61439-2
EMC:
EN 61000-6-2 / EN 61000-6-4 / EN 61000-3-12 / EN 61000-3-11
Grid codes:
DIN VDE V 0126-1-1 / VDE AR-N 4105:2018 / VDE AR-N 4110:2023 / C10/C11 / G99/1-9 / TOR Stromerzeugungsanlagen Typ A/B / CEI 0-16, CEI 0-21 / EN 50549-1/-2 / AS4777.2 / NTS 631, UNE 27002



For other grid codes please contact your local sales representative

Optional features	
Optional Energy Meter Ethernet	•
Optional Energy Meter RS485	•
PSTS Box + STS	•
Extension Kit 88.7 without Rack	•

The information is aligned with the Data file at the time of download.
Printed on 24/06/2026 (ID 197725)

©2026 | PR Industrial S.r.l. – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc.| All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

PRAMAC

www.pramac.com