

MP34-2

MOTOR PUMPS - FOR TRASH WATER




Self priming Petrol powered pumps to move large quantities of water, whether during flooding or simply filling a pond.

Main Technical Data

Type		Trash
Max suction head	m	8
Max Delivery Head	m	30
Delivery Volume	l/min	700

Performance curve

Graph

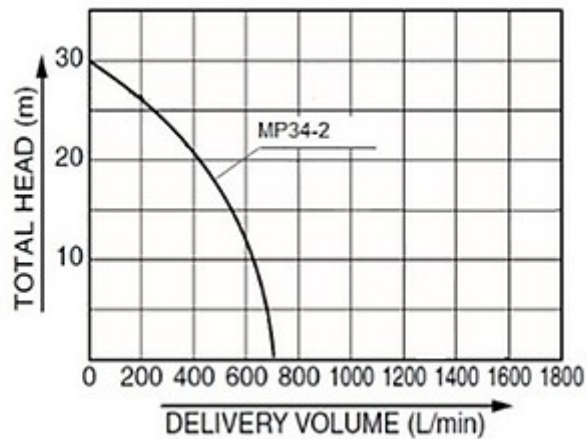

Engine specifications

Engine manufacturer		Honda
Nr. of cylinder and disposition		1 inclination angle
Displacement	cm ³	163
Fuel		Petrol
Starting system		Recoil



Pump specifications

Manufacturer		KOSHIN
Inlet pipe diameter	'	2
Outlet pipe diameter	'	2
Max Solid Size	mm	20
Material for mechanical seal		SiC
Material for impeller		Hi-Crome
Material for volute		Cast Iron



Dimensional data

Length	(L) mm	620
Width	(W) mm	462
Height	(H) mm	481
Dry weight	Kg	47

Consumption, running time and noise

Fuel tank capacity	l	3.1
Running time	h	2.2
Noise level at 7 m	dB(A)	78
Guaranteed noise level (LWA)	dB(A)	106

General equipment

Strainer	n°	1
Coupling Set	n°	2
Hose band	n°	3
Special Tool for pump		Standard
Spark plug tool		Standard
Oil guard		Standard



Accessories

Inlet pipes - length 8m		2"
Inlet pipes - length 25m		2"
Outlet pipes - length 10m		2"
Outlet pipes - length 50m		2"
Outlet pipes - length 100m		2"



The information is aligned with the Data file at the time of download. Printed on 15/01/2021 (ID 696)

©2021 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package.
Specifications subject to change without notice

