

## PMI 3000




Pramac PMi series inverter: optimal solution to combine silent operation with less fuel consumption and tension stability; the inverters Pramac stabilize the output tension and supply power for all kinds of equipment. They guarantee maximum efficiency: adjusting the speed according to the required load, our inverters reduce the average fuel consumption.

### PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	Watts	3000
Rated Power	Watts	2800



Engine		
Brand		Pramac
Type		OHV
Exhaust emission level		Stage V
Operating Speed Nominal	rpm	Variable
Fuel		Petrol
Starting Systems		Recoil
Oil capacity	l	0.52
Low Oil Shutdown		√

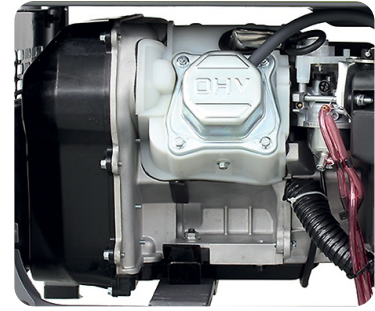

Alternator	
Voltage regulation system	Inverter

Dimensional data		
Length	(L) mm	555
Width	(W) mm	400
Height	(H) mm	450
Dry weight	Kg	38
Carton box dimension LxWxH	mm	585x415x465



Autonomy		
Fuel tank capacity		10
Fuel consumption @ 50%	l/h	1.6
Running time @ 50%	h	6



Noise level		
Guaranteed noise level (LWA)	dB(A)	96
Noise pressure level @ 7 m	dB(A)	68

## GENSET CONTROL

### COMMANDS

- Selector switch: O/I
- Air choke Valve
- Starting handle
- Smart throttle: Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.

### INSTRUMENTATION:

- Voltmeter, Frequency meter and Hourmeter (display)
- Outputting energy (indicator light - Green)
- Overloading and Oil alarming (indicators light - Red)

### PROTECTIONS

- Overload
- Oil Guard

### OUTPUT:

- DC12V 6A



**SOCKET TYPE**

SCHUKO 230V 16A IP44

2

